PQP-W-21

HINKAKU PRODUCTION APPROVAL

APPROVED	CHECKED	PREPARED
TEGUH W / PP MANAGER	TEGUH W / PP MANAGER	LITA DARMAWANTI / PP SSPV

Versi Indonesia

HINKAKU PRODUCTION APPROVAL

Dokumen ini "uncontrolled" jika dicetak atau dicopy tanpa stamp "controlled" oleh dept. yang berwenang

I. TUJUAN DAN RUANG LINGKUP

WHAT Petunjuk pembuatan dokumen hinkaku approval untuk mengkonfirmasi bahwa manufaktur siap untuk produksi produk baru yang dapat memenuhi persyaratan QCD

WHEN Instruksi ini digunakan ketika :

1. New project maupun new model
2. Ada perubahan tahunan (model year change)
3. Produk transfer

WHERE Instruksi ini berlaku di JAI untuk carmaker Toyota dan Mazda

WHO Penanggung jawab pembuatan Hinkaku approval adalah PP departemen seksi PLCT dan Costing

II. DEFINISI

PCCS : Pilot Completeness Check Sheet


MF : Mother Factory

BU : Business Unit

HINKAKU PRODUCTION APPROVAL

Dokumen ini "uncontrolled" jika dicetak atau dicopy tanpa stamp "controlled" oleh dept. yang berwenang

III.FLOWCHART

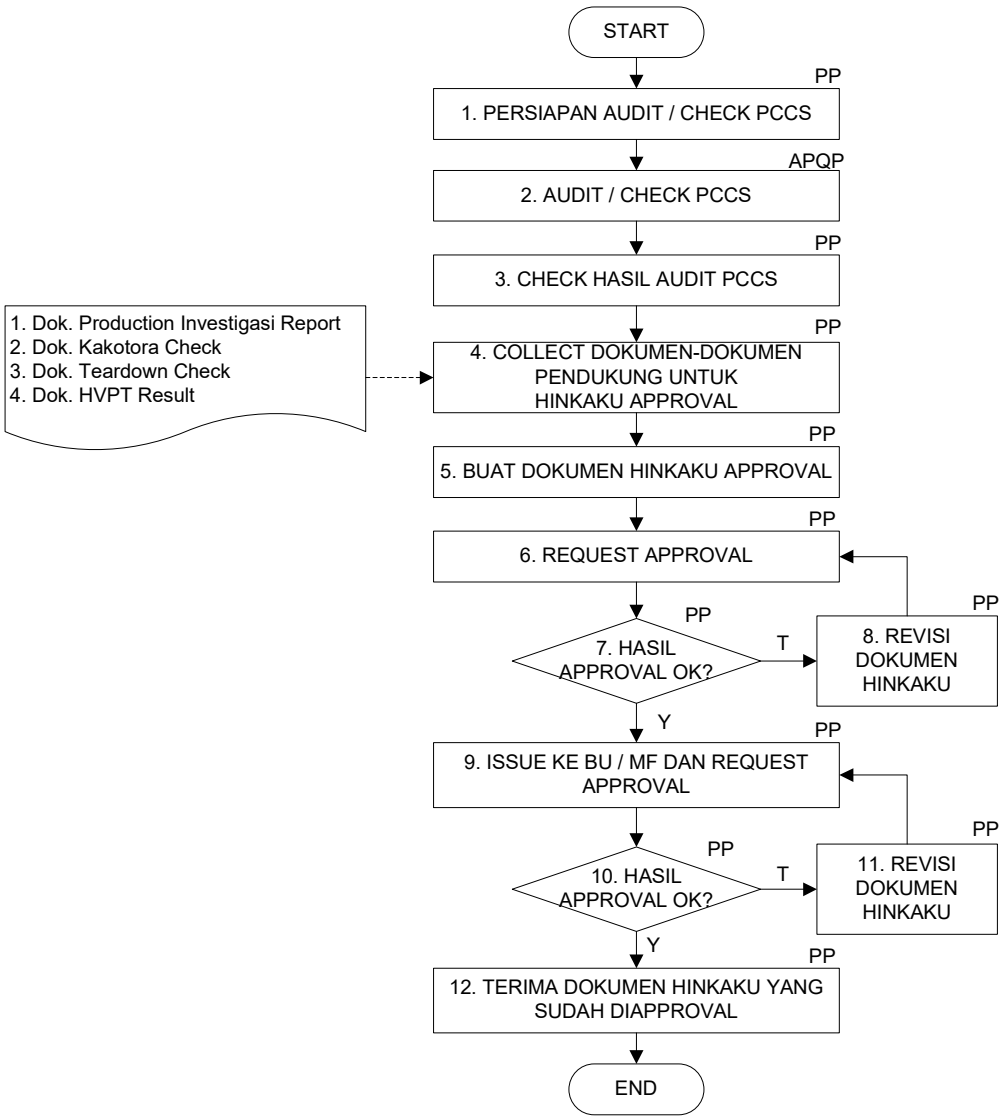

IV. PENJELASAN FLOWCHART

No	PIC	Aktivitas	Penjelasan
1	PP	Persiapan audit / check PCCS	Mempersiapkan checksheet PCCS dan informasi timing pelaksanaan PCCS
2	APQP	Audit / check PCCS	Melakukan audit PCCS internal maupun eksternal bersama seluruh member APQP
3	PP	Check hasil audit PCCS	Check hasil audit termasuk kondisi yang masih NG beserta countermeasure dan due datenya
4	PP	Collect dokumen-dokumen pendukung untuk hinkaku approval	Mengumpulkan dokumen-dokumen untuk hinkaku approval yaitu dokumen production investigasi report (PPC), dokumen kakotora check (QA), dokumen teardown check (QC Check WH) dan dokumen HVPT result (PP)
5	PP	Buat dokumen hinkaku approval	Buat dokumen hinkaku approval sesuai checksheet dari BU / MF
6	PP	Request approval	Mengajukan approval ke President (Factory Manager) JAI
7	PP	Hasil approval OK?	Jika hasil approval OK, lanjut ke no.9, jika tidak lanjut ke no.8
8	PP	Review dokumen hinkaku	Review dokumen hinkaku dan lakukan perbaikan / perubahan dokumen hinkaku maupun pendukungnya
9	PP	Issue ke BU / MF dan request approval	Issue dokumen hinkaku yang sudah disapprove oleh JAI ke BU/MF dan mengajukan approval hingga ke BU/MF Division Manager
10	PP	Hasil approval OK?	Jika hasil approval OK, lanjut ke no.12, jika tidak lanjut ke no.11
11	PP	Review dokumen hinkaku	Review dokumen hinkaku dan lakukan perbaikan / perubahan dokumen hinkaku maupun pendukungnya
12	PP	Terima dokumen hinkaku yang sudah di approval	Terima dokumen hinkaku yang disapprove dan record untuk penyimpanannya

HINKAKU PRODUCTION APPROVAL

Dokumen ini "uncontrolled" jika dicetak atau dicopy tanpa stamp "controlled" oleh dept. yang berwenang

V. INSTRUKSI HINKAKU PRODUCTION APPROVAL

A. RANK A,B & C

1	(Registration No.) TBU			BU
2	Vehicle Model Code	:	Diisi model code saat mass pro (_ _ _W) dan isi pada lingkaran Model change / minor change / remodel	PP JAI
3	Affiliate	:	Diisi PT. JATIM AUTOCOMP INDONESIA	PP JAI
4	Factory	:	Diisi PT. JATIM AUTOCOMP INDONESIA	PP JAI
5	W/H Family	:	Diisi dari W/H Family	PP JAI
6	W/H Name	:	Disii dari nama W/H (Contoh : 82111-XXXX)	PP JAI
7	Date of application	:	Diisi tanggal pembuatan dokumen hinkaku production approval	PP JAI
8	Affiliate	:		PP JAI
	Prepared	:	Diisi tanda tangan SPV PP	
	Checked	:	Diisi tanda tangan PL	
	Approvad	:	Diisi tanda tangan PM	
9	Date of mass production start	:	Diisi tanggal SOP yang diinginkan	PP JAI
10	Completion Verification by Affiliate			PP JAI
	Eval	:	Diisi "O" jika OK dan "X" jika NG / Reject [Spesifikasi desain sulit dipastikan, perbedaan besar antar produk, kemungkinan cacat]	
	Comments & ountermeasures	:	Diisi penjelasan dari NG dan juga countermeasurenya	
11	Responsibility of Affiliate			JAI
	Date	:	Diisi tanggal verifikasi	
	President (Factory Manager)	:	Diisi nama terang dan tanda tangan dari Presiden (Factory Manager)	
12	Final decision by auditor			BU
13	Production Preparation Completeness Verification			BU

B. RANK D

1	(Registration No.) TBU			BU
2	Vehicle Model Code		Diisi model code saat mass pro (_ _ _W) dan isi pada lingkaran Model change / minor change / remodel	PP JAI
3	Affiliate	:	Diisi PT. JATIM AUTOCOMP INDONESIA	PP JAI
4	Factory	:	Diisi PT. JATIM AUTOCOMP INDONESIA	PP JAI
5	W/H Family	:	Diisi dari W/H Family	PP JAI
6	W/H Name	:	Disii dari nama W/H (Contoh : 82111-XXXX)	PP JAI
7	Date of application	:	Diisi tanggal pembuatan dokumen hinkaku production approval	PP JAI
8	Affiliate	:		
	Prepared	:	Diisi tanda tangan SPV PP	PP JAI
	Checked	:	Diisi tanda tangan PL	PP JAI
	Approvad	:	Diisi tanda tangan PM	PP JAI
9	Completion Verification by Affiliate			PP JAI
	Eval	:	Diisi "O" jika OK dan "X" jika NG / Reject [Spesifikasi desain sulit dipastikan, perbedaan besar antar produk, kemungkinan cacat]	
	Comments & ountermeasures	:	Diisi penjelasan dari NG dan juga countermeasurenya	
10	Responsibility of Affiliate			JAI
	Date	:	Diisi tanggal verifikasi	
	President (Factory Manager)	:	Diisi nama terang dan tanda tangan dari Presiden (Factory Manager)	
11	Production Preparation Completeness			BU

Note : Rank A, B, C dan D sudah ditentukan oleh Mother Factory

VI. CATATAN PERUBAHAN

Rev.	Catatan Perubahan	Tanggal Selesai Revisi	PIC
0	Nomor revisi dari dokumen ISO /TS 16949 ini dimulai dari nol	11 Jul 2024	PP

[Vehicle model code] (2) | | | W | ○

[Registration No.] TBU (1)

Application for Production Preparation Completion Verification / Quality Confirmation Production Determination (HINKAKU Application Form)

Date of application: (7)

Affiliate	(8)	
Approved	Checked	Prepared

[Affiliate] (3)

[Factory] (4)

[W/H Family] (5)

[W/H Name] (6)

SECRET 秘 密

Date of mass production start: (9)

[Completion Verification by Affiliate] To be performed by President (Factory Manager) of the affiliate

*Evaluation Criteria ○ :OK × :Rejected [Hard to assure design spec., big variance among products, possible defects]

No.	Item	Standard	Eval.	Comments & countermeasures
1	**Process maintenance** [P.P. Comp Check]	Pilot completeness check is implemented with the check sheet. The number of "×" entered in evaluation score for key and important items is two or less. (10)		
2	**Production capability (1)** [Production Plan]	Production capability is judged with the investigation sheet and necessary volume that is N+6 months is ensured.		
3	**Production capability (2)** [HVPT]	HVPT report shows the target quantity of non-defective products per hour is achieved.		
4	**Quality Status (1)** [Past trouble]	All the items listed in Past Trouble (critical quality issue, at HVPT, latest model) Check Sheet are checked and measures are taken.		
5	**Quality Status (2)** [Teardown check]	Teardown is implemented and there are no problems on dimension, appearance and structure.		

(12) Final decision by auditor

[Responsibility of Affiliate] (11)

I hereby verify that the process can continue to make good products and have no problems regarding the items above.

Date: President (Factory Manager):

(13) **roduction Preparation Completeness Verification]** To be checked and approved by the lead factory's executive

<Verification: process auditor>

Auditor's signature Date:

☐ **Acceptable**

☐ **Acceptable with conditions**

☐ **Production not allowed**

[Conditions for approval]

Auditor's signature

Re-check ☐ **Problems solved**

Date:

<Verification: Initial Monitoring Committee Chairman, TBU Production Division Manager>

[Verification]

☐ **Acceptable**

☐ **Acceptable with conditions**

☐ **Production not allowed**

[Conditions or instructions]

Signed by Initial Monitoring Committee Chairman

Date:

[Approval]

☐ **Acceptable**

☐ **Acceptable**

☐ **Production**

[Conditions or instructions]

Signed by TBU Production Division Manager

Date:

Flow	Preparation of Form	Self-check (affiliate)	Production preparation	Production preparation status	Production preparation completion verification	Approval	Form receipt	DR 5 (Product shipment approval)	Form
	Affiliate	President or Factory Manager	Process Auditor (Lead factory depts)	Process Auditor (Lead factory depts)	Lead factory, Initial Monitoring Chairman	TBU W/H Prodn Mng Div Manager	Lead factory control dept	TBU Quality Executive	Affiliate

【Vehicle model code】 2

			W

【Registration No.】TBU- 1

Application for Production Preparation Completion Verification / Quality Confirmation Production Determination (HKK Application Form)

Date of issue: 7

Affiliate	8	
Approved	Checked	Prepared

【Affiliate】 3

【Factory】 4

【W/H Family】 5

【W/H Name】 6

【Completion Verification by Affiliate】 9

※Evaluation Criteria ○ :OK × :Rejected [Hard to assure design spec., big variance among products, possible defects]

No	Item	Standard	Eval.	Comments & countermeasures
1	**Process maintenance** [P.P. Status Report]	Production preparation status is checked with the P.P. Status Report and no problems are found.		
2	**Production capability** [Production Plan]	Production capability is judged with the investigation sheet and ensured for necessary volume.		
3	**Quality status (1)** [Recurrence prevention]	Measures are taken for all the items in Past Trouble Recurrence Prevention Check Sheet controlled by each department. △2		
4	**Quality status (2)** [Terminal crimping]	- No problems are found in the crimping test for 0.35sq or smaller wires. *Sheet for W/H TR inspection report		

[Responsibility of Affiliate] 10

I hereby verify that the process can continue to make good products and have no problems regarding the items above.

Date: President (Factory Manager):

[Production Preparation Completeness] 11

≪Initial Monitoring Committee Chairman≫

[Verification result]

- ☐ **Production preparation finished**
- ☐ **Acceptable with condition**
- ☐ **Not acceptable to manufacture Quality Confirmation Products**

[Comments]

Signature
Date:

≪TBU WH Production Division Manager≫

[Determination]

- ☐ **Acceptable**
- ☐ **Acceptable with condition**
- ☐ **Not acceptable**

[Instructions]

Signature
Date:

Doc flow

Application form / Affiliate	⇨	Self-check / Affiliate (President or Factory Mngr)	⇨	Receipt / Control Dept at Lead factory	Production preparation completion verification / Lead factory and Initial Monitoring Chairman	⇨	HKK Approval / TBU W/H Production Mngt Div Manager	⇨	DR5 Review (MP/ship aprv) / TBU executive of production	⇨	Approved form / Affiliate